

Notes:

EXTERIOR WINDOW FRAMING & GLAZING

GENERAL WINDOW NOTES:
 1. ALL DIMENSIONS SHOWN ON ARCHITECTURAL DRAWINGS ARE ROUGH OPENINGS. SHOP DRAWINGS SHOULD REFLECT APPROPRIATE FRAME SIZES INCLUDING JOINT SIZES PER MANUFACTURERS SPECIFICATIONS.
 2. G.C./SUB-CONTRACTOR TO FIELD VERIFY ALL OPENINGS PRIOR TO FABRICATION OF WINDOWS.
 3. SUBMIT COLOR SAMPLES FOR FRAMES AND GLAZING AS PART OF THE SHOP DRAWING PROCESS.

STOREFRONT SYSTEM:
 1. KAWNEER 451T - FRONT GLAZED
 2. FRAME COLOR - CLEAR ANODIZED ALUMINUM

CURTAINWALL SYSTEM:
 1. KAWNEER 1600 SYSTEM - 7-1/2" FRAME DEPTH
 2. STEEL REINFORCING TO BY FABRICATOR DURING SHOP DRAWINGS AS REQUIRED TO MEET MANUFACTURE SPECIFICATIONS AND WIND LOAD REQUIREMENTS.
 3. FRAME COLOR - CLEAR ANODIZED ALUMINUM

STOREFRONT & CURTAINWALL ENTRANCES:
 1. DOORS: KAWNEER 350 MEDIUM STILE
 2. PANIC PUSH BAR (DOUBLE DOORS): DOOR-O-MATIC #1690 CONCEALED VERTICAL ROD
 3. PANIC PUSH BAR (SINGLE DOOR): DOOR-O-MATIC #1790 RIM EXIT DEVICE
 4. PUSH BAR AT NON-LATCHING DOORS: STYLE CO-12CPH
 5. PULLS: STYLE CO-12
 6. CLOSER: NORTON 1605 BC, PARALLEL ARM MOUNTING W/ HEAVY DUTY ARM & HOLD OPEN
 7. THRESHOLD: ALUMINUM THRESHOLD 1/2" MAX HEIGHT (ADA)

GLAZING:
 1. ALL GLAZING TO BE LOW E-II
 2. PROVIDE TEMPERED GLAZING IN ALL AREA REQUIRED BY CODE.
 3. GLAZING COLORS:
 G1: 1" INSULATED CLEAR ECLIPSE ADVANTAGE (LOW E)
 -1/4" CLEAR ECLIPSE ADVANTAGE (LOW E SURFACE #2)
 -1/2" AIR SPACE
 G2: 1" INSULATED CLEAR ANNEALED
 -1/4" CLEAR ECLIPSE ADVANTAGE (LOW E) SPANDREL
 -1/4" CLEAR ECLIPSE ADVANTAGE (LOW E SURFACE #2)
 -1/2" AIR SPACE
 -1/4" CLEAR ANNEALED (SPANDREL COATING SURFACE #4)



BUILDING TYPE TH4CDU - RIGHT ELEVATION 1

SCALE: 1/4"=1'-0"



BUILDING TYPE TH4CDU - FRONT ELEVATION 2

SCALE: 1/4"=1'-0"

Key Plan:
 Architect's Stamp:
 Project:
Fifteen Great Road II LLC
 15 Great Road, Littleton, MA
 Client:
 Omni Properties, LLC
 200 Baker Ave, Suite 303
 Concord, MA 01742
 Tel: (978) 369-8844
 Project #: 12023
 Scale: As Noted
 Issue: Progress Date: 6/5/2012

Revisions: Date:
 Drawing Title:
 Building Type TH4CDU
 Exterior Elevations
 Sheet Number:
A.201

MAUGEL
ARCHITECTS INC
 200 Ayer Road, Harvard, MA 01451
 Tel: (978) 456-2800 Fax: (978) 456-2801
 www.maugel.com

THESE DOCUMENTS AND ALL IDEAS, ARRANGEMENTS, DESIGNS AND PLANS INDICATED THEREIN OR REFERENCED THEREIN ARE THE PROPERTY AND TRADE SECRET OF MAUGEL ARCHITECTS, INC. AND PART THEREOF SHALL BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION FOR ANY PURPOSE OTHER THAN THE SPECIFIED USE THEREFOR.

© 2012 MAUGEL ARCHITECTS, INC.

Notes:
EXTERIOR WINDOW FRAMING & GLAZING
GENERAL WINDOW NOTES:
1. ALL DIMENSIONS SHOWN ON ARCHITECTURAL DRAWINGS ARE ROUGH OPENINGS. SHOP DRAWINGS SHOULD REFLECT APPROPRIATE FRAME SIZES INCLUDING JOINT SIZES PER MANUFACTURERS SPECIFICATIONS.
2. G.C./SUB-CONTRACTOR TO FIELD VERIFY ALL OPENINGS PRIOR TO FABRICATION OF WINDOWS.
3. SUBMIT COLOR SAMPLES FOR FRAMES AND GLAZING AS PART OF THE SHOP DRAWING PROCESS.
STOREFRONT SYSTEM:
1. KAWNEER 451T - FRONT GLAZED
2. FRAME COLOR - CLEAR ANODIZED ALUMINUM
CURTAINWALL SYSTEM:
1. KAWNEER 1600 SYSTEM - 7-1/2" FRAME DEPTH
2. STEEL REINFORCING TO BY FABRICATOR DURING SHOP DRAWINGS AS REQUIRED TO MEET MANUFACTURE SPECIFICATIONS AND WIND LOAD REQUIREMENTS.
3. FRAME COLOR - CLEAR ANODIZED ALUMINUM
STOREFRONT & CURTAINWALL ENTRANCES:
1. DOORS: KAWNEER 350 MEDIUM STILE DOOR-O-MATIC #1690 CONCEALED VERTICAL ROD
2. PANIC PUSH BAR (SINGLE DOOR): DOOR-O-MATIC #1790 RIM EXIT DEVICE
4. PUSH BAR AT NON-LATCHING DOORS: STYLE CO-12CP1
5. PULLS: STYLE CO-12
6. CLOSER: NORTON 1605 BC, PARALLEL ARM MOUNTING W/ HEAVY DUTY ARM & HOLD OPEN
7. THRESHOLD: ALUMINUM THRESHOLD 1/2" MAX HEIGHT (ADA)
GLAZING:
1. ALL GLAZING TO BE LOW E-II
2. PROVIDE TEMPERED GLAZING IN ALL AREA REQUIRED BY CODE.
3. GLAZING COLORS:
G1: 1" INSULATED CLEAR ECLIPSE ADVANTAGE (LOW E) -1/4" CLEAR ECLIPSE ADVANTAGE (LOW E SURFACE #2) -1/2" AIR SPACE
G2: 1" INSULATED CLEAR ECLIPSE ADVANTAGE (LOW E) SPANDREL -1/4" CLEAR ECLIPSE ADVANTAGE (LOW E SURFACE #2) -1/2" AIR SPACE
-1/4" CLEAR ANNEALED (SPANDREL COATING SURFACE #4)



BUILDING TYPE TH4CDU - LEFT ELEVATION

SCALE: 1/4"=1'-0"

1

Key Plan:

Architect's Stamp:

Project:
Fifteen Great Road II LLC

15 Great Road,
Littleton, MA

Client:
Omn Properties, LLC
200 Baker Ave, Suite 303
Concord, MA 01742
Tel: (978) 369-8844

Project #: 12023

Scale: As Noted
Issue: Progress Date: 6/5/2012

Revisions: Date:

Drawing Title:
Building Type TH4CDU
Exterior Elevations

Sheet Number:

A.202

MAUGEL
ARCHITECTS INC


200 Ayer Road, Harvard, MA 01451

Tel: (978) 456-2800 Fax: (978) 456-2801

www.maugel.com

THESE DOCUMENTS AND ALL IDEAS, ARRANGEMENTS, DESIGNS AND PLANS INDICATED THEREIN OR REFERENCED THEREIN ARE THE PROPERTY AND TRADE SECRET OF MAUGEL ARCHITECTS, INC. AND PART THEREOF SHALL BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION FOR ANY PURPOSE OTHER THAN THE SPECIFIED USE.

© 2012 MAUGEL ARCHITECTS, INC.

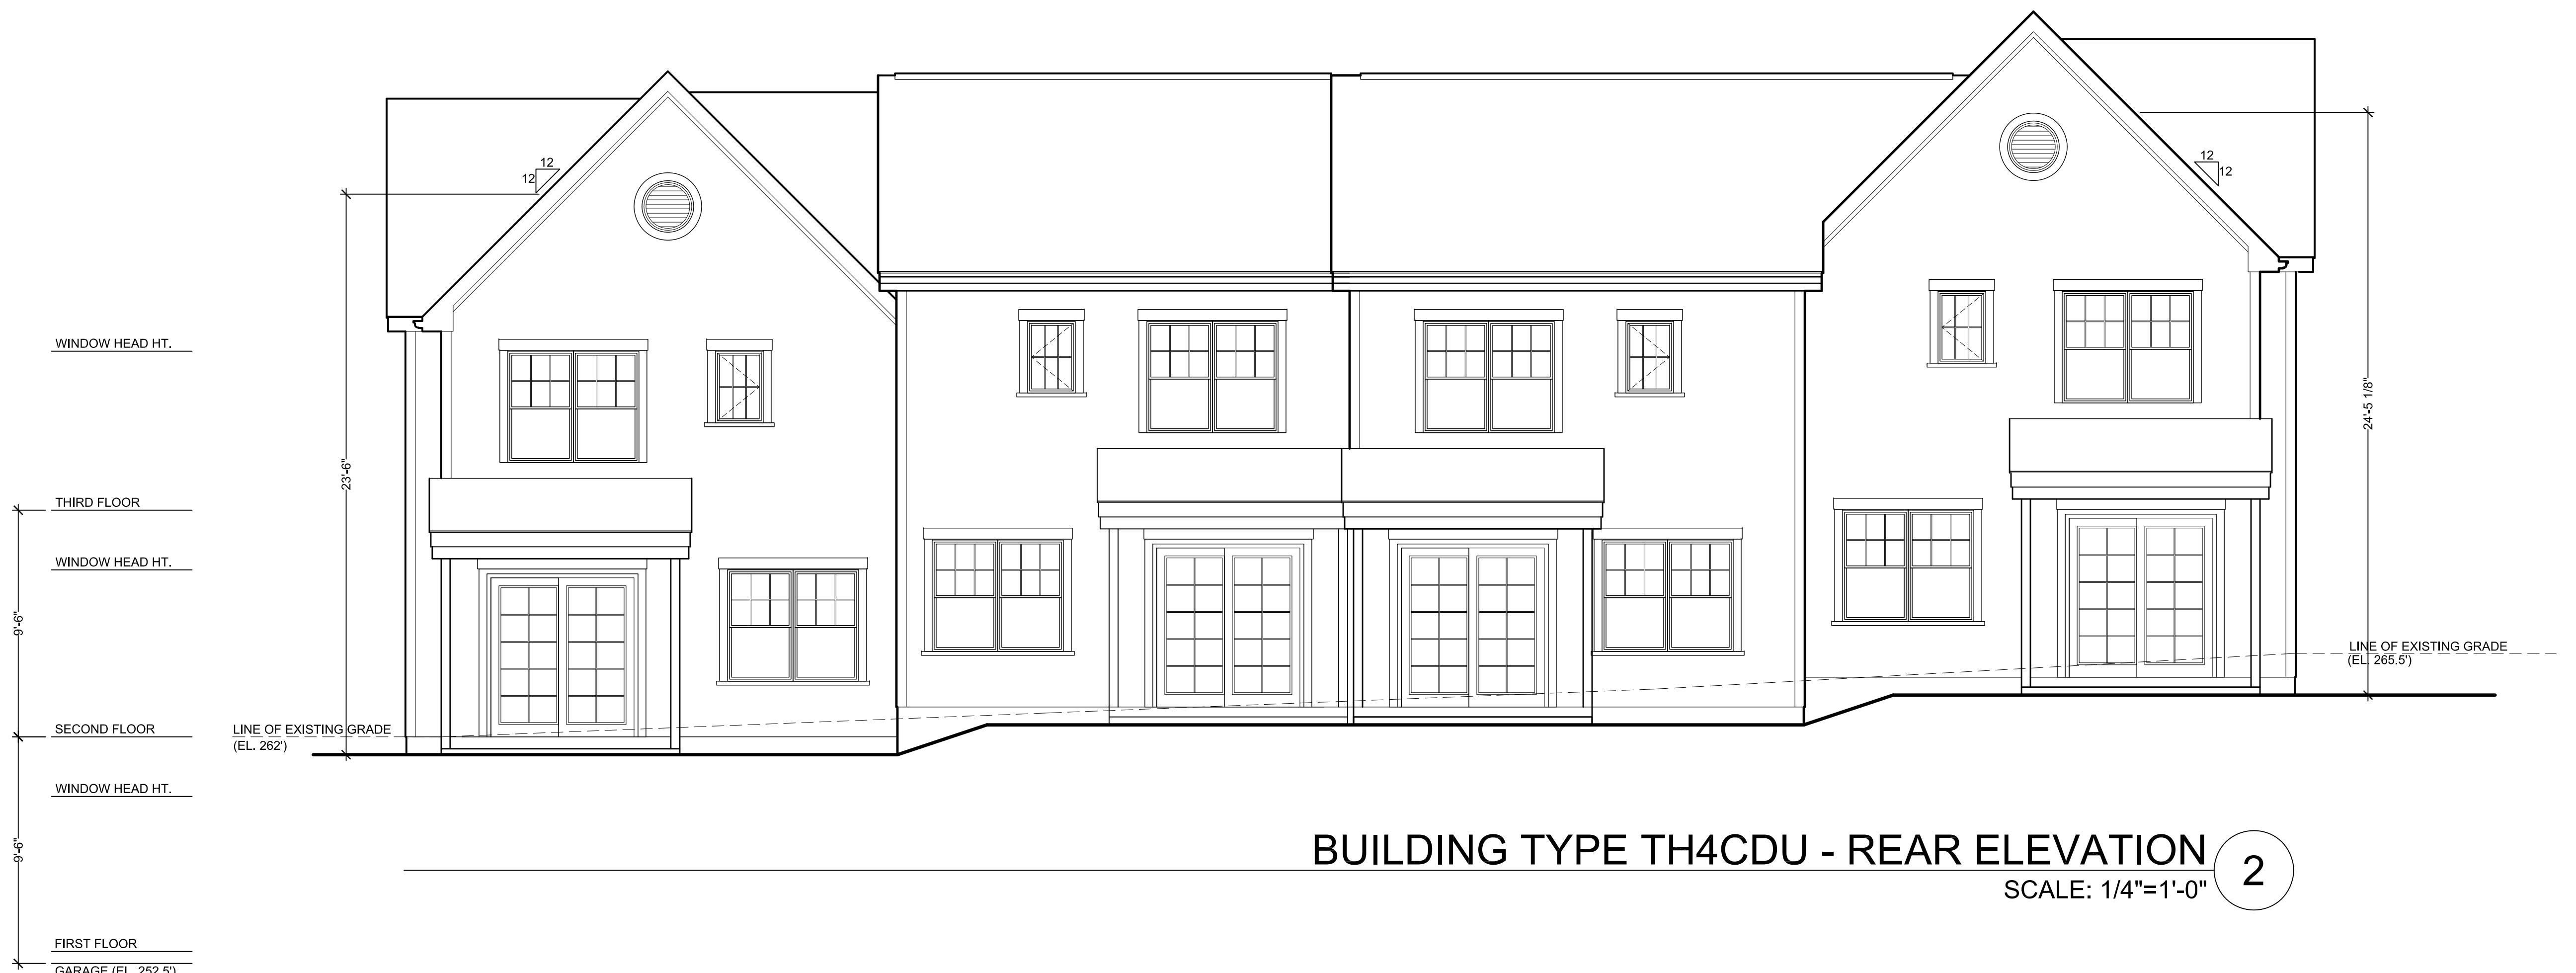

BUILDING TYPE TH4CDU - REAR ELEVATION

SCALE: 1/4"=1'-0"

2

FIRST FLOOR
GARAGE (EL. 255')

SECOND FLOOR
(EL. 264.5')

THIRD FLOOR

WINDOW HEAD HT.

WINDOW HEAD HT.